

IAS-200S


SWING DOOR OPERATOR

IAS-200S swing door system is designed for entrances where aesthetics, superior safety and sustainability are important.


With no visible arm and an integrated operator, this door system is unique on the market and makes a perfect fit to entrances in harsh environments like schools and transport hubs.

With no visible operator, this door system doesn't require any extra cleaning on top of the operator and arm, it adapt heavy duty, high efficiency 36V brushless motor for max 150kg door. Meanwhile working together with smart controller, it can work with safety device, access control system, etc. It can really release your hand.


Electronic Closing Sequence

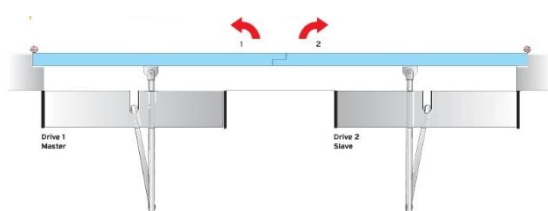

Detail Display

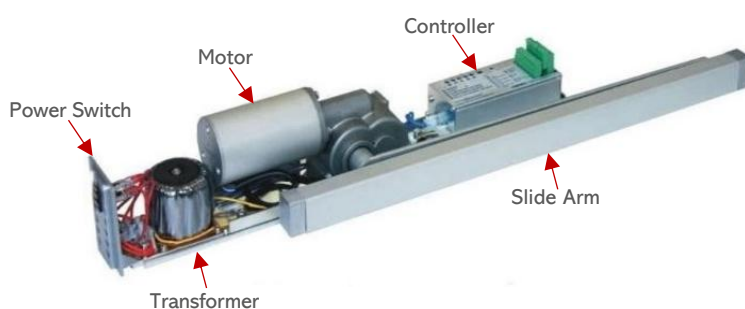

Operational Diagram

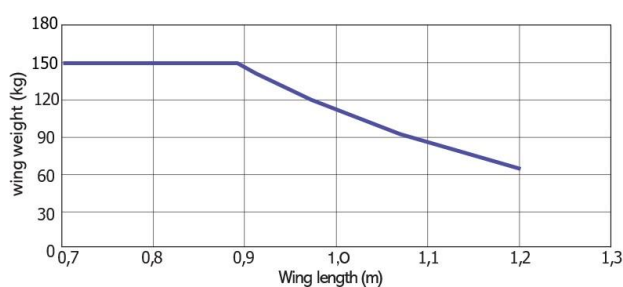

Technical Data

Models	IAS-200S Swing Door
Type of operation	Motor opening & closing
Product dimension (mm)	518 X 77 X106
Door type	Single open & double open
Open angle	0°-110°
Max capacity	150kg
Opening leaf time	2-4s
Closing leaf time	2-4s
Opening time (Adjustable)	1-30s
Manual force (Power fails)	30N
Power supply	50W
Power consumption	230V 50Hz
Working temperature	-20°C to +50°C

* Taiwan Technology