


IAS-60S

SWING DOOR OPERATOR

The IAS-60S unit width 600mm, compact size to fit more application scenarios. Industrial aesthetic design, striving for small and beautiful artistic feeling. Although the unit is small, the power is still strong, no less than the traditional unit.





Operational Diagram

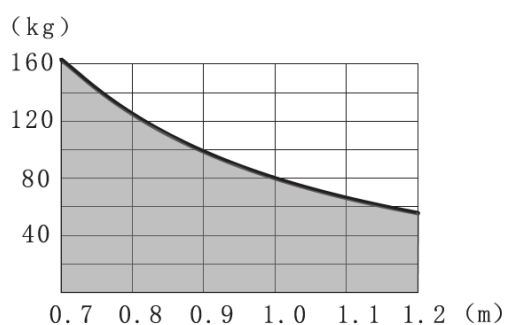

The width of the is 60mm and the compact size is suitable for more application scenarios.

Sectional View

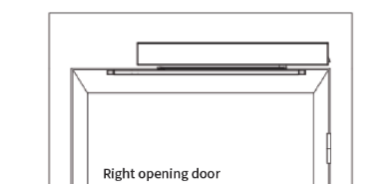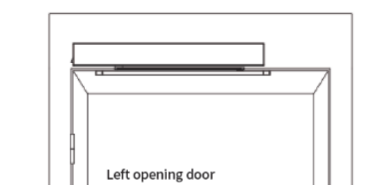

Technical Data

Models	IAS-60S Swing Door
Drive unit	24V DC Motor
Anti-extrusion device	Standard
Power supply voltage	AC220V±10%, 50/60Hz
Power consumption	Max 75W, standby 3W
Opening time (adjustable)	3 – 7S
Closing time (adjustable)	3 – 7S
Open hold time (adjustable)	0.5-30S
Opening angle	80°-100°
Drive arm	Pull arm / push arm
Working temperature	-20 ~ +45°C
Relative Humidity	≤85%

* Taiwan Technology